

TECHNICAL INFORMATION SHEET



Benefits

- Independent Laboratory and Field Test Data available upon request showing compliance with Approved Document Part E, 2003 and Section H of the Scottish Building Regulations.
- Excellent impact and airborne performance
- Offers long term performance without collapse or “bottoming” out under high point loads
- Resistant to ageing and deformation
- Quick and easy to install
- High quality and exact material thickness guaranteed
- Mildew and moisture proof
- Zero global warming potential (GWP) and zero ozone depletion potential (ODP)
- Accreditation to ISO 9001, ISO 14001 and ISO 18001
- Product manufactured using Recycled Materials and 100% recyclable

Applications

Designed for a wide range of high performance isolation applications, Regupol® 6010SH is particularly suited to heavily loaded areas in:

- Luxury apartments
- Penthouses
- Hotels
- Schools
- Hospitals
- Libraries
- Retail
- Music studios

Description

A recycled tyre crumb product, Regupol® 6010SH has been specifically developed for heavy load bearing areas where acoustic performance is critical. A sustainable and high performing screed isolation solution, Regupol® 6010SH delivers the greatest load bearing capacity in the CMS Danskin underscreed range.

Physical Information

Sheet length	1.25m
Sheet width	10m
Material thickness	10mm & 15mm nominal

Technical Information


Mean value of dynamic stiffness	28.8MN/m ³ (DIN EN 29052-1)
Density	595kg/m ³
Tensile strength (DIN 53571)	approx 0.4N/mm ²
Thermal conductivity	approx 0.14W/mK
Elongation at break	approx 70%
Maximum load bearing capacity	10,000kg/m ² (100kN/m ²)
Temperature resistance	-40°C to +110°C
ΔL _W (impact improvement)	30dB (BS EN ISO 140-8:1998)

Installation Service



In addition to supply of this product CMS Danskin Acoustic Solutions can provide a listing of competitively-priced approved installers that service anywhere in the UK. Use of this service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting CMS Danskin acoustic materials correctly. Please contact CMS Danskin on 01925 577711 for a list of approved and qualified installers.

Important Notes:


- Manual Handling Guidelines and health and safety datasheets are available on request.

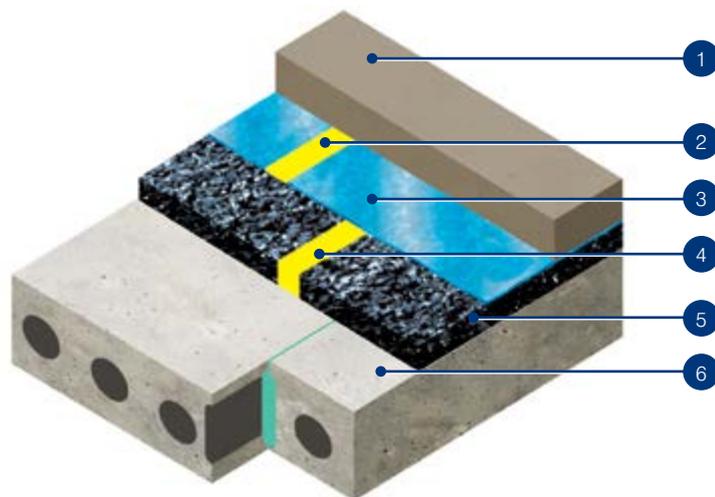

Joint Detail

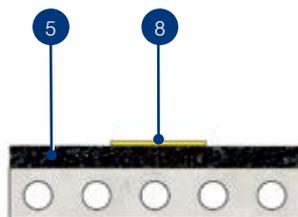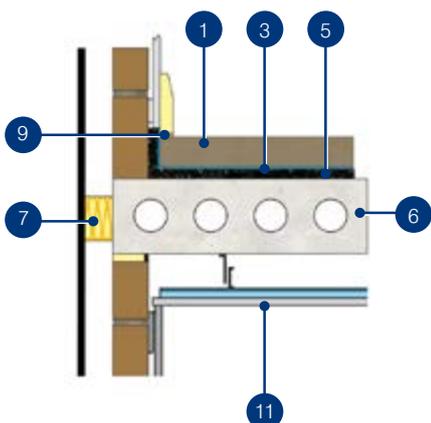

Perimeter Detail

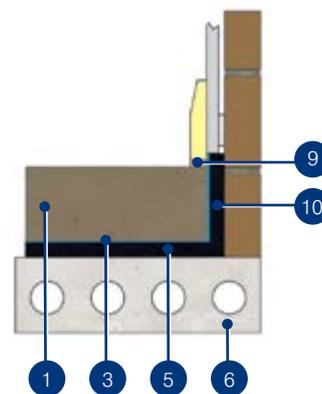

All illustrations for example purposes only

- | | |
|---|--|
| 1. 65mm sand cement screed | 8. Regupol® hi-tack tape or similar approved |
| 2. Taped joint* | 9. Acoustic sealant |
| 3. Min.500 gauge polythene | 10. Regupol SH perimeter strip |
| 4. Regupol® high tack tape | 11. Ceiling (construction type will vary) |
| 5. Regupol® 6010SH 10mm or 15mm layer | |
| 6. Pre-cast or beam and block floor, minimum 300kg/m ² | |
| 7. Acoustic cavity closer | |
- *DPM overlap to be minimum 100mm



To access the CMS Danskin website for further product information please scan the QR code

IMPORTANT: Directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product is suitable for the purpose intended.

Regupol® and Regufoam® are registered trade marks of BSW GmbH

Scotland Office:

1 Netherton Road, Wishaw ML2 0EQ

Central/Southern Office:

Unit 2 Lyncastle Road, Warrington, Cheshire WA4 4SN

email: info@cmsdanskin.co.uk website: www.cmsdanskin.co.uk

t: 01698 356000 f: 01698 372222

t: 01925 577711 f: 01925 577733