

Multi Acoustic Roll

Data Sheet | November 2015



Multi Acoustic Roll



Value for Money



Acoustic Insulation



BRE Green Guide Rating



Recycled Glass Bottles



A1 Non-combustible

Multi Acoustic Roll is a lightweight, non-combustible glass mineral wool roll for use in metal and timber stud partitions, separating floors and drylining systems.

Multi Acoustic Roll is easy to install and provides excellent sound absorption performance in accordance with Approved Document E (England & Wales) and Technical Handbook Section 5 (Scotland) acoustic requirements.

Product dimensions and information					
Thickness (mm)	Length (m)	Width (mm)	Area (m ²)	Packs per pallet	Code
60	11.25	1200, 2x600, 3x400	13.50	24	5510
65	10.40	1200, 2x600, 3x400	12.48	24	5506*
75	8.50	1200, 2x600, 3x400	10.20	24	5514*
80	10.40	1200, 2x600, 3x400	12.48	24	5511
100	10.10	1200, 2x600, 3x400	12.12	24	5504

*Non-Standard Product


[teamworks]

www.superglass.co.uk


Your insulation team
Superglass

Multi Acoustic Roll | Typical Applications


Timber and metal stud partitions, separating floors and drylining systems.

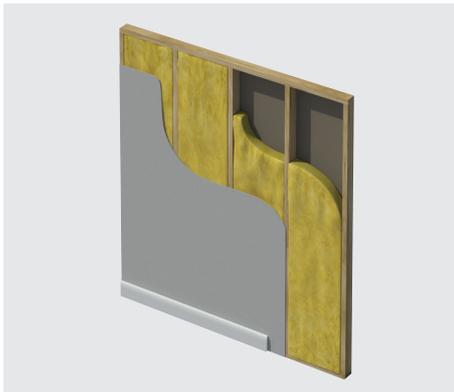

Timber Stud Partitions

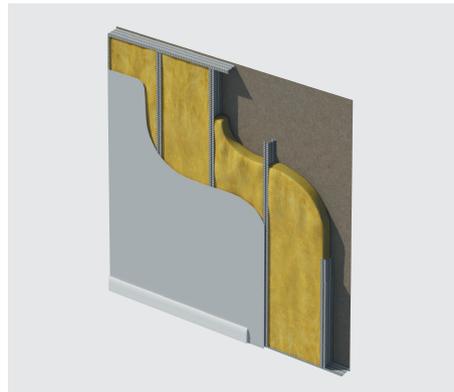

Metal Stud Partitions

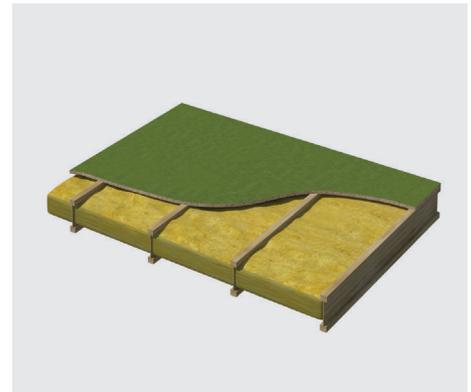

Separating Floors

Density

Multi Acoustic Roll is manufactured at a minimum density of 10kg/m³.

Environmental

Multi Acoustic Roll has a Generic A+ BRE Green Guide Rating. Multi Acoustic Roll is classified as having zero ODP (Ozone Depletion Potential), zero GWP (Global Warming Potential) and is CFC and HCFC free.

Recycled Content

Multi Acoustic Roll is manufactured from up to 84% recycled glass that would otherwise go to landfill.

Durability

Multi Acoustic Roll is non-hygroscopic, will not rot, degrade or sustain vermin and will not encourage the growth of mould, bacteria or fungi.

Standards

Multi Acoustic Roll is manufactured to comply with the requirements of CE Marking 93/68/EEC and Technical European Harmonised Standards BS EN 13162:2012, BS EN 13172: 2012. Also manufactured in accordance with BSI Quality Assurance Standard BS EN ISO 9001: 2008.

Declaration of Performance

A copy of the product DoP can be downloaded from www.superglass.co.uk

Fire Classification

Multi Acoustic Roll is classified as non-combustible with a Reaction to Fire Classification A1 when tested to BS EN 13501-1.

Vapour Resistance

Multi Acoustic Roll possess negligible vapour resistance allowing vapour to pass freely through the insulation.

Handling & Storage

Multi Acoustic Roll is supplied compression packed in polythene to provide short term protection. For long term protection, the product must be stored indoors or under a waterproof covering in order to protect against weather damage. Multi Acoustic Roll should not be left permanently exposed to the elements.

Health & Safety

The product Safety Datasheet can be downloaded from the Superglass website.

Associated Products

Acoustic Partition Roll (APR)
Multi Purpose Acoustic Slab

Superglass Insulation Limited

Thistle Industrial Estate, Kerse Road, Stirling, Scotland FK7 7QQ

TECHNICAL

Hotline: **0844 381 4022**

Email: technical@superglass.co.uk

Fax: **01786 451245**

SALES

Tel: **01786 451170**

Email: sales@superglass.co.uk

Fax: **01786 451245**

www.facebook.com/superglassinsulationltd

www.twitter.com/superglassins

www.linkedin.com/company/superglass-insulation-ltd

For further information or alternative dimensions please contact the Technical Department.

Please note - all dimensions are nominal.